

V-TAC

Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL LED SOLAR FLOOD LIGHT



TECHNICAL DATA

MODEL	VT-777-7
SKU	24341
LUMENS	900 Lm
POWER	7W
SOLAR PANEL	2.6Wp, Mono Crystalline Silicon
BATTERY TYPE	3.7V Lithium Battery, 3600 mAh
LIGHTING PANEL	135° Adjustable
BRACKET	360° Adjustable
BEAM ANGLE	120°
CHARGING TIME	6-8Hours
WORKING TIME	12-60Hours
LED TYPE	SMD 2835x64Pcs



03 YEAR WARRANTY*

IP65 RATING

DETECTION ANGLE	120°
SENSOR RANGE	2-6 M
DIMENSION	231.9x149.6x35mm
IK RATING	IK07
BODY TYPE	ABS+PC+Aluminium
INSTALLATION HEIGHT	≤4 M

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 3 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.



FR
Cet appareil, ses accessoires, cordons et batteries se recyclent

À DÉPOSER EN MAGASIN



À DÉPOSER EN DÉCHÈTERIE



OU

Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !


IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

WARNING

- Please make sure to turn off the power before starting the installation.
- Installation should be done by certified electrician.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.







This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

INSTALLATION INSTRUCTIONS

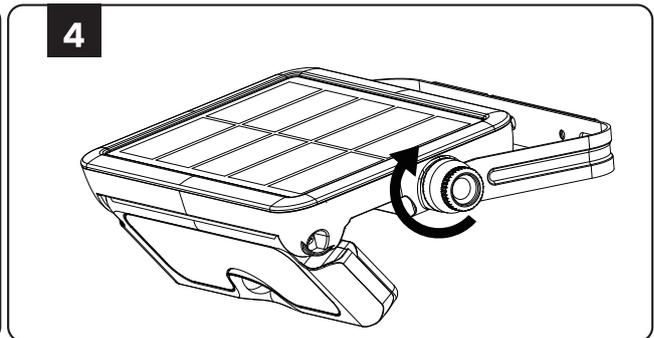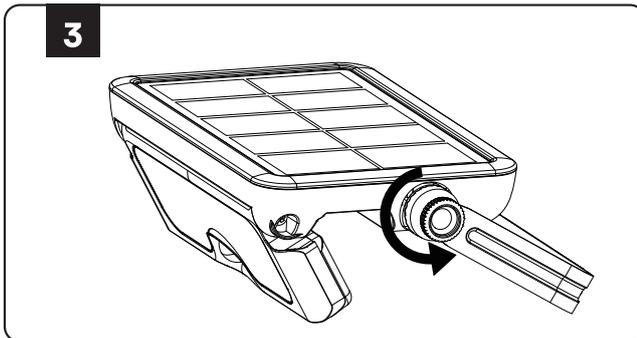
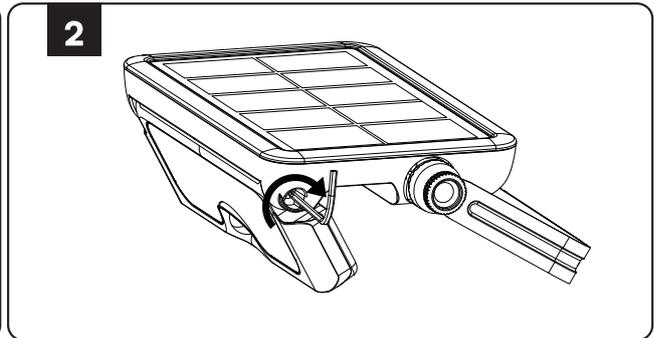
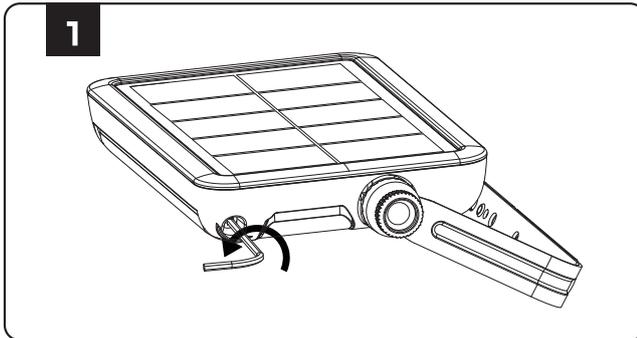


1. Prepare lamp, accessories and tools well firstly.
2. Use Allen wrench to loosen the light panel and adjust it to the demanded lighting angle (see picture 1), then fix the screw tightly (Picture 2).
3. Rotating the screw to loosen the bracket (Picture 33), adjust it to the appropriate angle and then fix the screw tightly (Picture 4).

INSTALLATION A: WALL MOUNTED


Please use the measure card to drill 2 holes of $\varnothing 8\text{mm}$ with a spacing of 132.5mm, then fix the lamp onto the wall with expansion plugs and screws.

* The recommended mounting height is 2-4Mtrs.

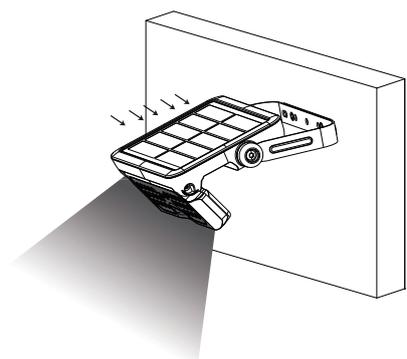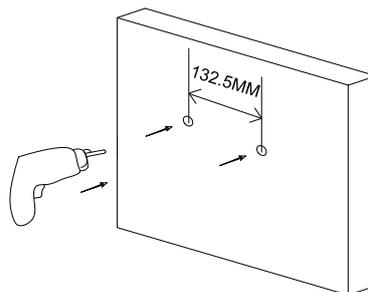


INSTALLATION B: PUT ON FLAT SURFACE DIRECTLY

Push aside the stand bracket and put it on a flat surface.

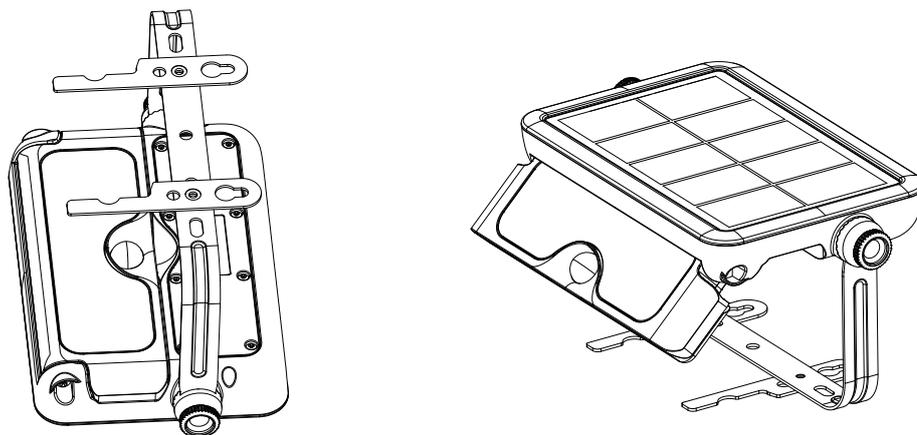


INSTALLATION C: HANG ON THE WALL

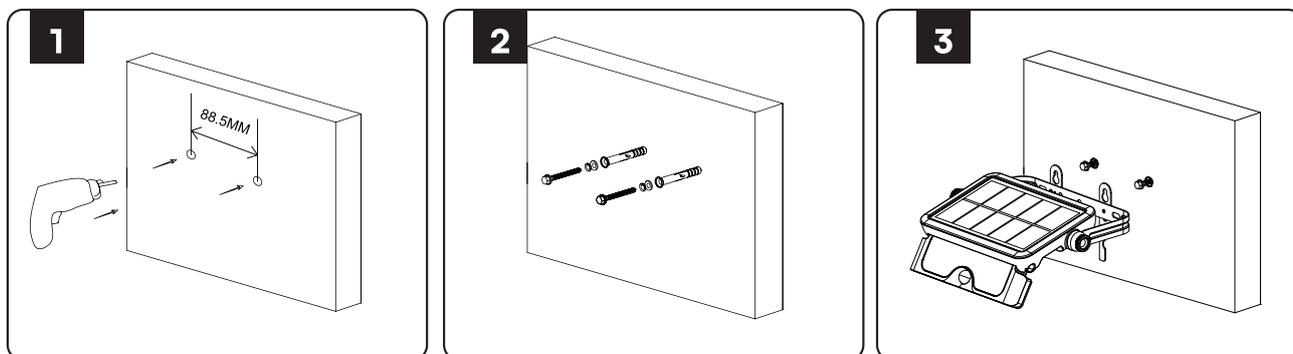

1. Please drill 2 holes of $\varnothing 8\text{mm}$ on the wall with a spacing of 88.5mm. (Picture 1)
2. Fix the expansion plugs and screws into the holes with a spare space (do not lock to the bottom). (Picture 2)
3. Push aside the stand bracket, align the hanging holes to the screws and hang the lamp on the wall. (Picture 33)* The recommended hanging height is less than 2Mtrs.

WORKING MODES

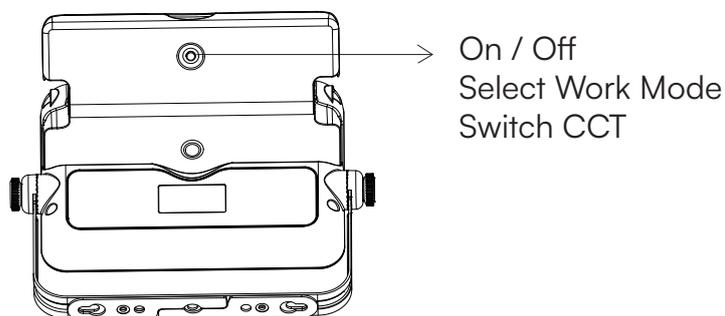


SWITCH CCT

In any mode of A, B, or C, long press the button for 1.5 seconds to switch the color temperature.

* The CCT Switch includes a memory function.


SENSOR MODE

Press the button 1st time, the lamp flashes once and turns on to Mode A: Lamp automatically lights up at night, automatically turns to full brightness when motion is detected in the range $\leq 6\text{mtrs}$, then dims to 2% brightness after 20 seconds of no motion.

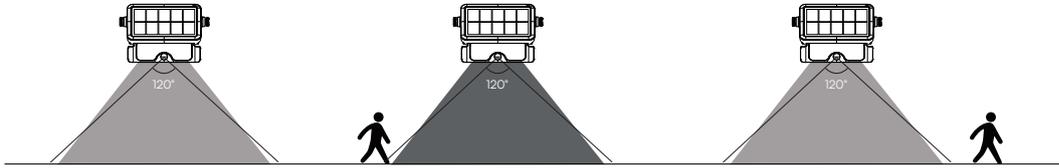

KEEP LIGHTING MODE

Press the button 2nd time, the lamp flashes twice and turns to Mode B: Lamp automatically lights up at night and keeps full brightness for 5 hours, then turns to Mode A.

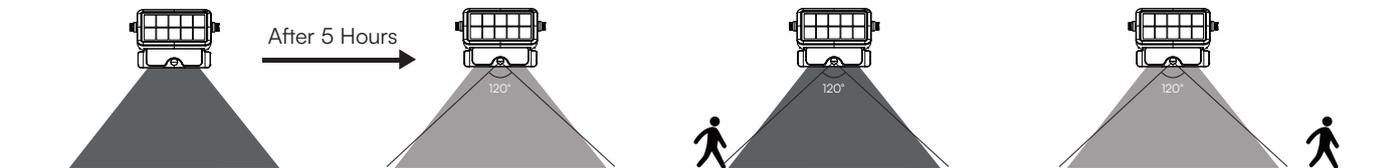


OFF

Press the button 3rd time, the lamp flashes three times and turns off.

WORK LIGHT MODE

In the off state, long press the button for 3 seconds, the lamp will light up and enter Mode C:

Light sensor and PIR motion sensor are both dis-activated in Mode C, lamp will permanently keep lighting until the battery power reduces to zero switching back to Mode A.

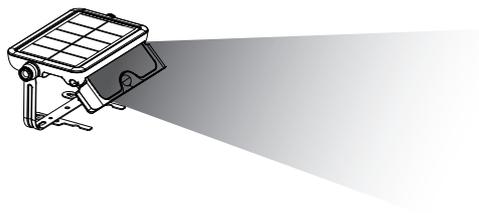

MAINTENANCE & WARNING

- Do not use solvents, petrol, etc. Otherwise the light will be damaged.
 - Clean the light with a dry, lint-free cloth.
 - Check the solar panel for dirt regularly. If dirt or is present remove it to guarantee flawless function of the product.
 - Especially during the winter, keep the product free from snow and ice.
 - Confirm installation direction is correct (solar panel should be at top)
 - Confirm no objects blocking the solar panel to receive sunlight
 - Keep away from the fire.
 - Don't immerse in the water
-

IMPORTANT NOTES

- This product contains battery type "Secondary" (rechargeable).
- Electrical and electronic equipment that has become waste is known as old equipment/device. Old devices must not be disposed of with other household waste.
- Owners of old devices at the end of its service life must return the device by taking them to the collection points set up by public waste disposal authorities or distributors. This return does not entail any costs for you.
- Owners of old devices have an obligation to remove accessible batteries / rechargeable batteries as well as non-destructively removable lamps from the old device prior to return. This does not apply if old devices are being prepared for reuse with the participation of a public law firm.
- Battery removal warning: The battery contained in this product must be removed only by professional personnel only. The battery must never be removed by the end user, if not removed correctly it could damage the battery which could cause fire.
- Batteries removed from an old electronic device should be disposed of separately. This return of battery does not entail any costs for you and the user is obliged to return the battery.
- Please make sure that this product is not powered on when removing the battery. Fire hazard! Avoid short-circuiting the contacts of a detached battery. Do not incinerate the battery. Please handle the battery with Caution!
- If electrical appliances or batteries are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.



- The symbol of "Crossed rubbish bins "indicates that this product should not be disposed of with other household wastes and must be collected separately from unsorted municipal waste at the end of its service life.
- Please use the link below to view the online directory of the collection and return points:<https://www.ear-system.de/ear-verzeichnis/sammel-und-ruecknahmestellen>



VTAC EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: SUPPORT@V-TAC.EU
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 0AX