

Characteristic:

Safety lock buckle, easy installation, screw terminal output.


Product picture printing is for reference only,
subject to the actual product

Technical index:


- Mounting type:Free hanging (In-Line)
- Material of core: Laminated silicon steel
- Applicable standard:: GB20840-2014
- Operating temperature: -25℃ ~ +60℃
- Storage temperature: -30℃ ~ +90℃
- Frequency range: 50Hz-60Hz
- Waterproof grade: IP00
- Dielectric strength: 3.5KV 50Hz 1min

Electrical parameters:The following parameters are typical values. The actual values shall be subject to the actual measurement of the product




Rated input	100A		150A		200A			250A			300A			 Current output type The secondary is not allowed to open the road
Rated output	5A		5A		5A			5A			5A			
Turns ratio	1： 20		1： 30		1： 40			1： 50			1： 60			
Accuracy	1%	3%	1%	3%	0.5%	1%	3%	0.5%	1%	3%	0.5%	1%	3%	
Power	0.5VA	1VA	1VA	2.5VA	1VA	2.5VA	3.75VA	1VA	2.5VA	3.75VA	1VA	2.5VA	3.75VA	
Weight	204g													

Dimension (in mm±0.5) :

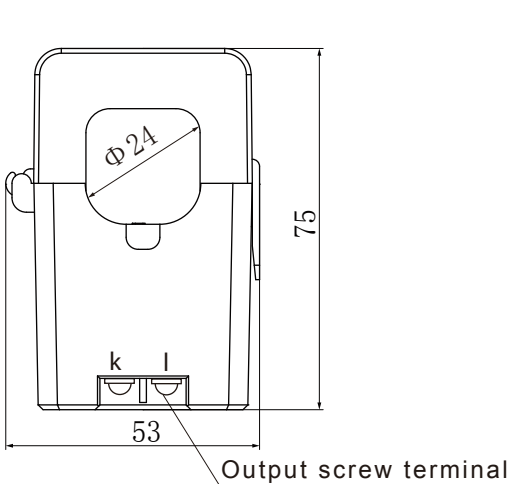

Front view

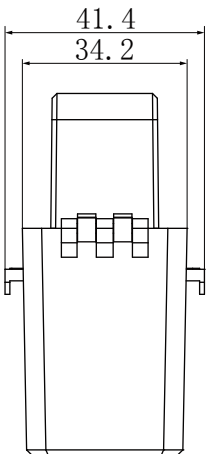

Side view

